

PRODUCT BENEFITS

- ✓ **Extreme Temperature Resistance**
-55°C – 285°C
- ✓ **Extreme Pressure Resistance**
- ✓ **Superior Flexibility**
- ✓ **No Reversion**
- ✓ **Meets and Exceeds Industry Standards**
ASTM D2000 ✓

HIGH TEMPERATURE SILICONE



TECHNICAL DETAILS

Standard Silicone vs High Temp Silicone

STANDARD SILICONE	ATTRIBUTE	HIGH TEMP SILICONE
-55°C – 260°C	Operating Temperature	-55°C – 285°C
285°C	Intermittent Temperature	300°C
45%	Applied Adhesion Retention	76%

The Global Leader in the manufacture of
High Performance and Advanced Polymer Products

PACKAGING

CONSTRUCTION:

- ✓ Hand Wrapped
- ✓ Extruded

REINFORCEMENT:

- ✓ Fiberglass
- ✓ Meta Aramid

 Heavy Duty Truck

 Agricultural



 Industrial Power

 Turbo Applications

 Aerospace



Molecules are **LOCKED** together
Tomorrow's Chemistry Today!

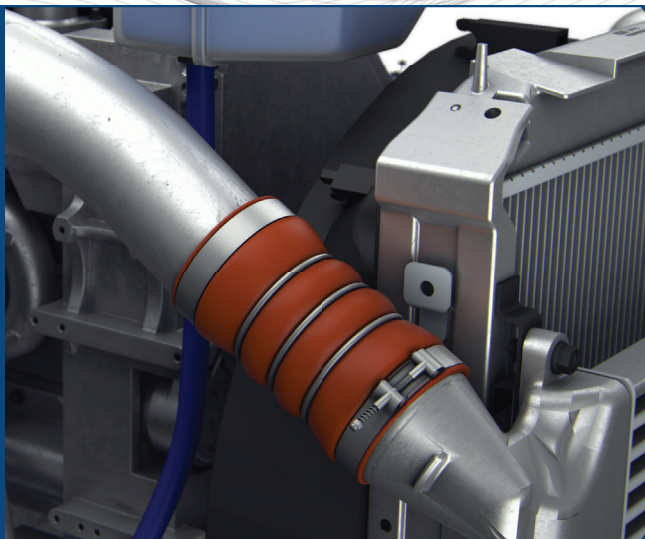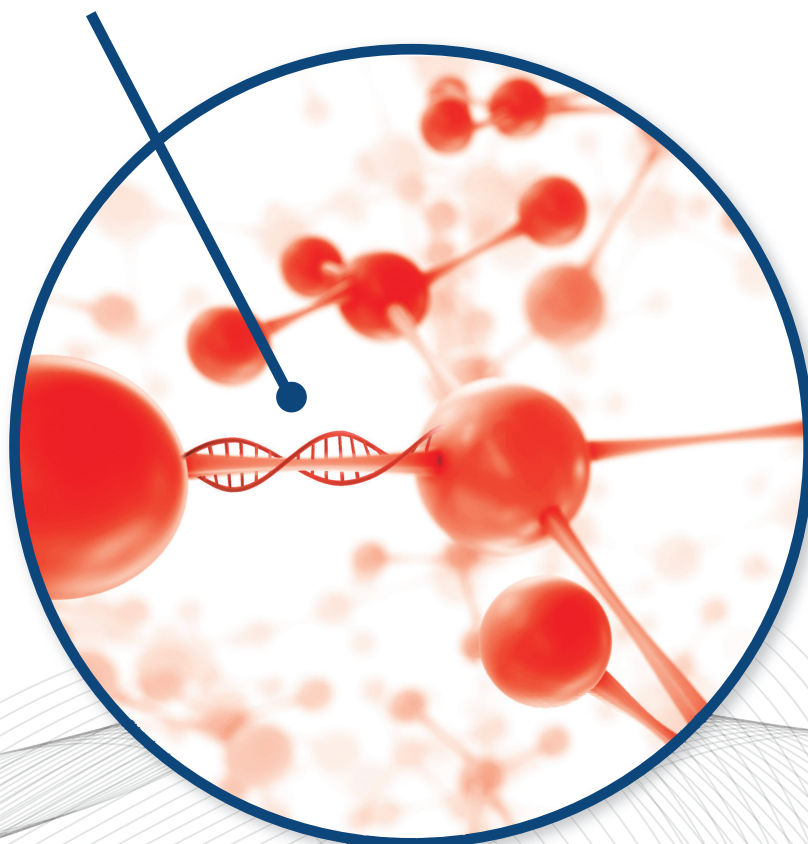

Same Purpose
**More Durable
Construction**

www.flexfab.com

ZZZ-43053 11.18

Flexfab, LLC. 1699 West M-43 Highway,
Hastings, MI 49058

 **Flexfab**[®]
Engineering trust. Around the world.™